

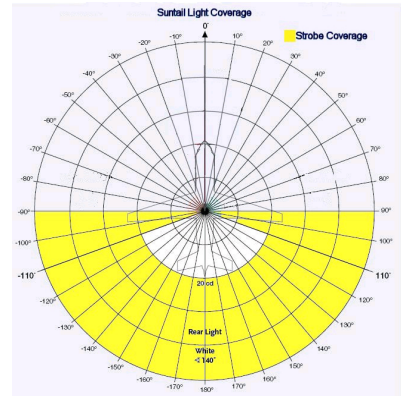
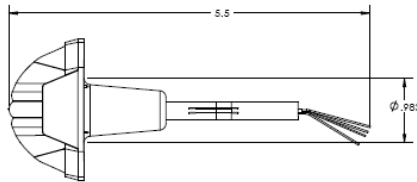





# Product Datasheet

## SunTail Position/Strobe Light

### 11-1160

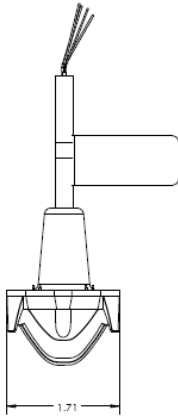

Voltage Range: 9-36VDC  
 Position Current 14VDC: 0.4A : 14V, 0.2A : 28V  
 Strobe Peak Current: 3.3A : 14V, 1.65A : 28V  
 for 0.19 seconds  
 Power Consumption: 12 Watts Avg  
 Power Supply: Built In  
 Synchronization: Built In  
 Thermal Protection: Built In  
 Position Light: TSO C-30c Type III  
 Strobe: TSO C-96a Class II (100L  
 to 100R) TSO C-96a  
 Class III (90L to 90R)  
 LED Count: 18

Height: 2.15"  
 Width: 1.7"  
 Wire Length: 18"  
 Depth: 2.61"  
 Weight: 3 Oz  
 Heat Sink Material: Clear Coated Aluminum  
 Lens Material: Polycarbonate  
 Rated Life: 50,000 Hours  
 Temperature Range: -55C to +70C