

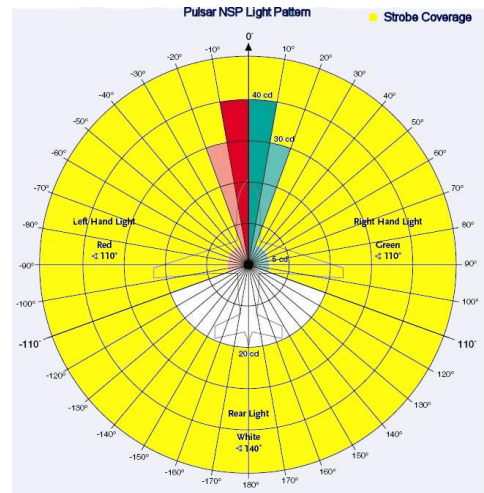




# Product Datasheet

## Pulsar NSP Nav/Position/Strobe Light

### 11-1180-C-( )-( ) red and green

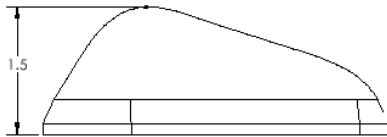

Voltage Range: 9-36VDC  
 Position Light Current: 0.4A : 14V, 0.2A : 28V  
 Strobe Peak Current: 5A : 14V, 2.5A : 28V for 0.19 seconds  
 Power Consumption: 17 Watts Avg  
 Strobe Power Supply: Built In  
 Strobe Synchronization: Built In  
 Thermal Protection: Built In  
 Nav/Position Light: TSO C-30c Type I, Type II, Type III  
 Strobe: TSO C-96a Class II  
 LED Count: 18

Length: 4"  
 Width: 1.85"  
 Wire Length: 18"  
 Depth: 1.5"  
 Weight: 4 Oz  
 Heat Sink Material: Clear Anodized Aluminum  
 Lens Material: Polycarbonate  
 Screw Mount: 3x 6-32 Machine Screws  
 Rated Life: 50,000 Hours  
 Temperature Range: -55C to +70C

